




### Quick Specs

Input Voltage	120-277VAC
Output Voltage	24VDC
Ambient Temp	-30°C - + 40°C / -86°F - + 104°F
Environment	Dry and Damp

### Customer Assistance

For technical questions regarding the installation or operation of this product, please contact our customer support team:


 347-334-6368 ext 3

 [www.ambientechinc.com](http://www.ambientechinc.com)



### Before You Begin


To avoid fire, shock, or death, turn the power off at circuit breaker and test to ensure the power is off before wiring.




### Dimming Modes

MODE	LED(1)	CURVE	LED(2)
RED	Tunable White	Ax	Red
ORANGE	Dim to Warm	Bx	Orange
GREEN	Only Dimming	Cx	Green

Press Button to Choose Mode/Rotate Dimming Curve



### 1. Open wiring compartment

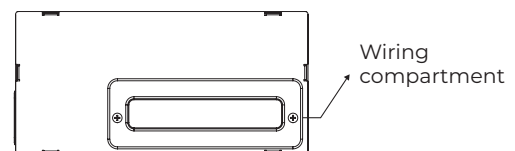

### 2. Punch knockouts for wiring conduit access



### Wiring Diagram

With the power switched Off, connect the wires according to the wiring diagram below.

**Note:** If you are connecting more than one wire to each terminal, it is recommended to form a pigtail connection.

